




# GroundTrak



GroundTrak is the ultimate solution for robust and reliable temporary ground protection, providing a stable and safe surface for heavy foot traffic, equipment, and light vehicles, supporting loads up to 20 tonnes. Its unique streamlined design allows for easy portability, setup, and relocation, making it versatile for various applications. GroundTrak features amazing non-slip properties due to its raised square top pattern, and is durable and weather-resistant to ensure long-lasting use.

### Features

- ◆ **Typical applications:** Perfect for construction sites, outdoor markets and trade shows, temporary parking solutions, outdoor recreation and sports events, emergency access routes, outdoor weddings and special events, camping and outdoor stages.
- ◆ **Material:** 100% Recycled PVC.
- ◆ **Cleaning:** Using a stiff brush will usually remove most dirt and debris. For more stubborn dirt, a pressure washer can be used.
- ◆ **Warranty:** Lifetime.

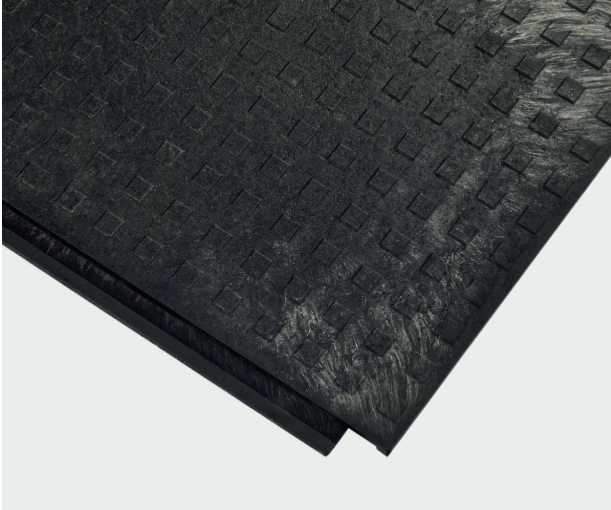

Suitable for indoor and outdoor use

For more information about this product or, to place an order [click here](#)

Code	Metric	Imperial	Thickness	Weight	Colour
GST3248BL	800mm x 1200mm	31" x 47"	22mm	22kgs	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

### Our delivery promise

We guarantee your order will be shipped on time, every time. That's the Blue Diamond difference.

V1.06.24

### Get in touch

+44 (0) 1779 841 899  
sales@bluediamond.uk.com  
www.bluediamond.uk.com

# GroundTrak



## Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Chemical resistant:	Yes, resistant to most chemicals, grease, and oils
Connectable:	Mats are connectable to create any shape or size
Cut to size:	Yes, mat can be cut to bespoke sizes
Dry area:	Yes
Wet area:	Yes
Heavy area:	Yes
Wheeled area:	Yes
Environment:	Suitable for indoor and outdoor use
Impact resistant:	Yes

Product testing:	◆ Anti-slip rating: R10 (EU standard: DIN 51130:2010)
	◆ Fire testing: B rating of classification of reaction to fire performance (Testing method in accordance to EN 13501-1:2018)
	◆ Water absorption: 0.51% (PN-EN ISO 62:2008)
	◆ Modulus of tensile stiffness: 100MPa
	◆ Tensile strength: 2.9MPa
	◆ Deformation at break point: 10.3%
	◆ Charpy impact strength: 6.89kJ/m <sup>2</sup> (PN-EN ISO 179-1:2010)
	◆ Ball indentation hardness: 48.4MPa (PN-EN ISO 2039-1:2004)
	◆ Hardness shore A: 86.3°Sh (PN-EN ISO 868:2005)
	◆ Ball press hardness: 48.4MPa (PN-EN ISO 2039-1:2004)
	◆ Electrical properties
	◆ Insulation resistance: 2.55*10 <sup>13</sup> Ω/cm (PN-EN 62631-3-1:2016:10 IEC 60093:1980)
	◆ Surface resistance: 7.14*10 <sup>13</sup> Ω/cm (PN-EN 62631-3-2:2016:04 IEC 60093:1980)
	◆ Dielectric strength: 8.11kV/mm (PN-EN 60243-1:2013-12)

Sustainability:	Made from 100% recycled PVC
-----------------	-----------------------------