


Happy Feet

Happy Feet is a heavy-duty anti-fatigue mat that features a 12.7mm dense foam cushion encapsulated in nitrile rubber, making it suitable for both wet and dry environments. Offering exceptional anti-fatigue benefits, the gripper backing minimises movement on the floor, whilst the textured surface and bevelled borders maximise safety. Happy Feet is a totally versatile mat, is welding safe and resistant to chemicals, animal fats, machine grease/oils and petroleum products.

Features

- ◆ **Typical applications:** Ideal for use in heavy duty industrial applications including welding areas and static sensitive areas.
- ◆ **Material:** Nitrile rubber.
- ◆ **Cleaning:** Rinse with a hose or pressure washer. Hang or lay the mat flat to dry.
- ◆ **Sustainability:** REACH compliant.
- ◆ **Warranty:** Lifetime.

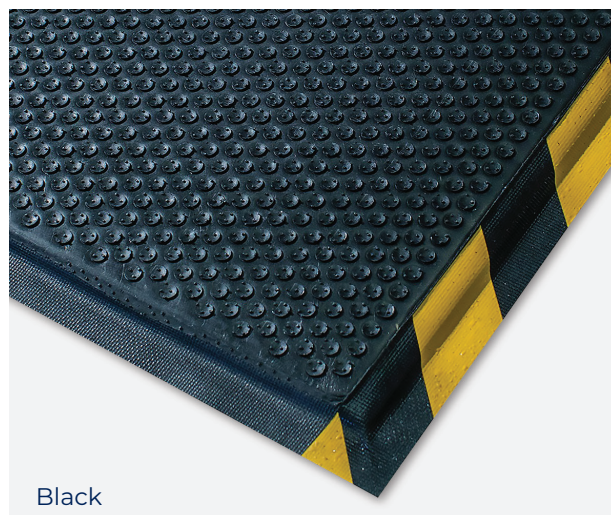

Black



For more information about this product or, to place an order [click here](#)

Code	Metric	Imperial	Thickness	Weight	Colour
HF2436BL	58cm x 85cm	2' x 3'	12mm	4.9kg	Black
HF2436BY	58cm x 85cm	2' x 3'	12mm	4.9kg	Black/Yellow
HF3660BL	85cm x 150cm	3' x 5'	12mm	11.4kg	Black
HF3660BY	85cm x 150cm	3' x 5'	12mm	11.4kg	Black/Yellow

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

Our delivery promise

We guarantee your order will be shipped on time, every time.
That's the Blue Diamond difference.

V3.10.23

Get in touch

+44 (0) 1779 841 899
sales@bluediamond.uk.com
www.bluediamond.uk.com

Happy Feet

Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Anti-fatigue:	Excellent anti-fatigue properties, resistant to level 3
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Chemical resistant:	Yes
Disability friendly:	Yes, the mats have ramped edges making them suitable for wheelchair users
Dry area:	Yes
Wet area:	Yes
Oily and greasy area:	Yes
Heavy area:	Yes
Welding area:	Yes
Environment:	Suitable for indoor and outdoor use
Flame retardant:	Yes
Non-static (ESD):	Yes
Product testing:	<ul style="list-style-type: none"> ◆ Certified high-traction by the National Floor Safety Institute (NFSI) ◆ DUROMETER: 65 ◆ Tensile strength: 1600 PSI ◆ Textured Nitrile Rubber Surface for superior slip resistance ASTM C 1028-96 ◆ Static Coefficient of Friction: Dry-.92 Wet-.86 ◆ Electrostatic Propensity of Carpets: Maximum Negative 0,7kv ◆ Passes Flammability Standard DOC-FF-1-70.Passes ATTCC Test Method 134-1996
Sustainability:	REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
UV resistant:	Yes, the solid nitril rubber surface provides UV resistance
Cleaning:	Rinse with a hose or pressure washer. Hang or lay the mat flat to dry