


Interflex Hazard

Interflex Hazard is a hard wearing anti-slip resistant black PVC matting with high visibility yellow strips down each side for workplace safety and roof walkways. Suitable for heavy duty industrial and commercial environments where slip hazards exist. The matting is designed to self-drain making it suitable for use in wet areas both indoor and outdoor, and is oil, grease and chemical resistant. Connector clips are available for side or end joining to create the perfect shape or fit.


Wind load tested: Up to 80mph*.

Features

- ◆ **Typical applications:** Suitable for workplaces where slip hazards exist in the processing and manufacturing industry. Also suitable for roof top walkways.
- ◆ **Material:** Soft PVC.
- ◆ **Cleaning:** Interflex Hazard can be hand cleaned, machine and steam cleaned.
- ◆ **Sustainability:** Recyclable material. REACH compliant.
- ◆ **Warranty:** Lifetime.

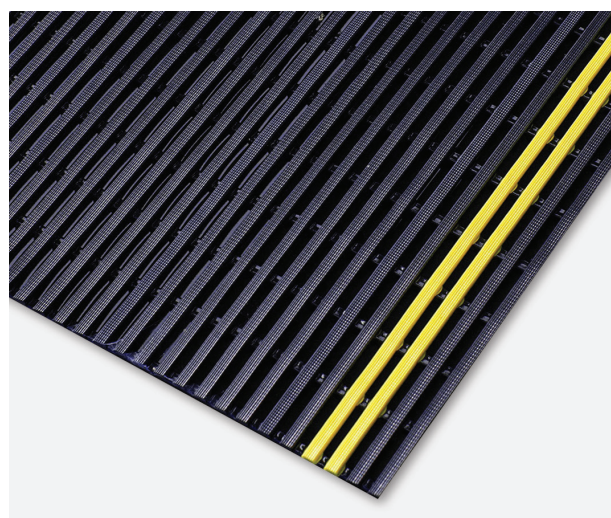

For more information about this product or, to place an order [click here](#)

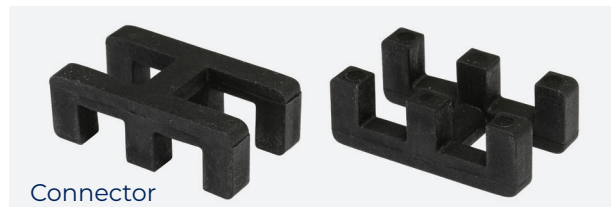

Code	Metric	Imperial	Thickness	Weight	Type	Colour
IH2433	60cm x 10m	2' x 33'	12.5mm	43kg	Roll	Black/Yellow
IH3233	80cm x 10m	3' x 33'	12.5mm	57kg	Roll	Black/Yellow
IH3933	100cm x 10m	3' x 33'	12.5mm	72kg	Roll	Black/Yellow
IH4733	120cm x 10m	4' x 33'	12.5mm	86kg	Roll	Black/Yellow
IH24	60cm wide	2' wide	12.5mm	4.3kg	Cut length - per m	Black/Yellow
IH32	80cm wide	3' wide	12.5mm	5.7kg	Cut length - per m	Black/Yellow
IH39	100cm wide	3' wide	12.5mm	7.2kg	Cut length - per m	Black/Yellow
IH47	120cm wide	4' wide	12.5mm	8.6kg	Cut length - per m	Black/Yellow

Our delivery promise

We guarantee your order will be shipped on time, every time.
That's the Blue Diamond difference.

V4.05.24

Get in touch

+44 (0) 1779 841 899
sales@bluediamond.uk.com
www.bluediamond.uk.com

Interflex Hazard

Code	Metric	Imperial	Thickness	Weight	Type	Colour
IFC	30mm x 20mm	1" x 1"	10mm	0.01kg	Connector	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

Technical Specification

Slip resistant: Great slip resistance to level 2

Anti-fatigue: Great anti-fatigue properties, resistant to level 2

Wear resistant: Excellent wear resistance to level 3, suitable for heavy footfall

Water absorbent: The two-layer construction and channelled underbars allows water to self-drain

Chemical resistant: Yes, resistant to most chemicals, grease, and oils

Connectable: Yes, mats are connectable to create any shape or fit

Cut to length: Yes, mat can be cut to length

Cut to size: Yes, mat can be cut to bespoke sizes

Dry area: Yes

Wet area: Yes

Oily and greasy area: Yes

Heavy area: Yes

Environment: Suitable for indoor and outdoor use

Product testing:

- ◆ Slip resistance: Classification R10 to DIN 51130
- ◆ Wind load tested: Up to 80mph*

Sustainability:

- ◆ Recyclable material
- ◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)

Temperature resistance: -5°C to +60°C

Cleaning: Interflex Hazard can be hand cleaned, machine and steam cleaned

* Wind testing was carried out in a controlled environment – report available upon request