



GRP Grating Stair Tread

GRP Grating Stair Treads are a cost-effective way to increase safety to stairways, with an easy installation due to being lightweight and limited tooling required for installation. The gritted surface provides excellent traction which makes them ideal for use in any environment, indoor or outdoors, whilst allowing for drainage and air circulation. Our GRP Grating Stair Treads are tough and durable making them suitable for use in even the harshest of environments, including frosty and wet areas, as they will not twist, rot or warp. Whilst enhancing an environments safety they also maintain an attractive appearance.

Optional clips, bolts and clamps are available to purchase if required.

Features

- ◆ **Typical applications:** Suitable for the use in residential, leisure, construction, rail, marine, offshore environments, commercial and industrial environments, providing an anti-slip solution to stairways and access points.
- ◆ **Material:** GRP - Glass reinforced polyester with a resin coated gritted surface, Adhesive - Epoxy Resin.
- ◆ **Cleaning:** Using a stiff brush will normally be sufficient to remove everyday dirt and debris. For more stubborn dirt, wash with warm water and a mild detergent, or a pressure washer on a low-pressure setting can also be used.
- ◆ **Sustainability:** REACH compliant

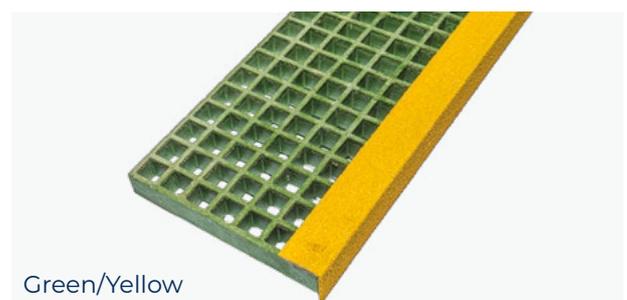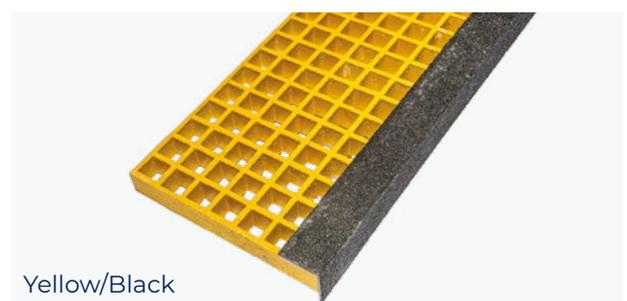

Suitable for
indoor and outdoor use



For more information about this product or, to place an order [click here](#)

Code	Size	Thickness	Weight	Colour
GS1139-38GY/YL	996 x 275 x 38mm	42mm (including nosing)	6.2kg	Grey/Yellow
GS1139-38YL/BL	996 x 275 x 38mm	42mm (including nosing)	6.2kg	Yellow/Black
GS1139-38GN/YL	996 x 275 x 38mm	42mm (including nosing)	6.2kg	Green/Yellow
GS1148-38GN/YL	1220 x 275 x 38mm	42mm (including nosing)	7.5kg	Green/Yellow

Our delivery promise

We guarantee your order will be shipped on time, every time.
That's the Blue Diamond difference.

v1.01.26

Get in touch

+44 (0) 1779 841 899
sales@bluediamond.uk.com
www.bluediamond.uk.com

GRP Grating Stair Tread

Code	Size	Thickness	Weight	Colour
GSI148-38GY/YL	1220 x 275 x 38mm	42mm (including nosing)	7.5kg	Grey/Yellow
GSI148-38YL/BL	1220 x 275 x 38mm	42mm (including nosing)	7.5kg	Yellow/Black
GSI239-38GN/YL	996 x 310 x 38mm	42mm (including nosing)	6.95kg	Green/Yellow
GSI239-38GY/YL	996 x 310 x 38mm	42mm (including nosing)	6.95kg	Grey/Yellow
GSI239-38YL/BL	996 x 310 x 38mm	42mm (including nosing)	6.95kg	Yellow/Black
GSI248-38GN/YL	1220 x 310 x 38mm	42mm (including nosing)	8.3kg	Green/Yellow
GSI248-38GY/YL	1220 x 310 x 38mm	42mm (including nosing)	8.3kg	Grey/Yellow
GSI248-38YL/BL	1220 x 310 x 38mm	42mm (including nosing)	8.3kg	Yellow/Black

Please note, cutting tolerance +/- 5mm

GRP Grating Stair Tread

Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Water absorbent:	Open top design allows liquids to self-drain
Chemical resistant:	Yes
Cut to size:	Yes, mat can be cut to bespoke sizes
Dry area:	Yes
Wet area:	Yes
Oily and greasy area:	Yes
Heavy area:	Yes
Environment:	Suitable for indoor and outdoor use
Flame retardant:	Yes
Impact resistant:	Yes
Non-conductive (Electrical):	Yes
Non-conductive (HV Electrical):	Yes
Product testing:	<ul style="list-style-type: none"> ◆ Slip resistance <ul style="list-style-type: none"> ◆ Tested to BS 7976.2 - PTV 'Extremely Low' for wet and dry conditions, PTV'Low' for oily and greasy conditions ◆ Coefficient of Friction (CoF): Dry 72; Wet 68 and Oil 63 ◆ Fire classification <ul style="list-style-type: none"> ◆ EN 13501-1: Class B-s1, d0 ◆ ASTM E84-2018 Class 1 ◆ UV certificate <ul style="list-style-type: none"> ◆ UV Weather ISO 4892-2 Xenon Arc 5000hrs
Sustainability:	◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
Temperature resistance:	-50°C to +110°C
UV Resistant:	Yes
Cleaning:	Using a stiff brush will normally be sufficient to remove everyday dirt and debris. For more stubborn dirt, wash with warm water and a mild detergent, or a pressure washer on a low-pressure setting can also be used