

GroundTuff® Range

Temporary Ground Protection


Blue Diamonds GroundTuff® matting range is an invaluable solution for anyone managing outdoor projects which require temporary ground protection. The range is valuable all year round, from providing wet ground coverage to limiting dust spread or generally protecting a specific area.

Frequently used in the hire industry, on construction sites or at events.

GroundTuff mats are designed to distribute loads evenly, reduce the risk of accidents, and offer cost-effective, adaptable solutions for a wide range of environments.




GroundTuff (GP3248BL)

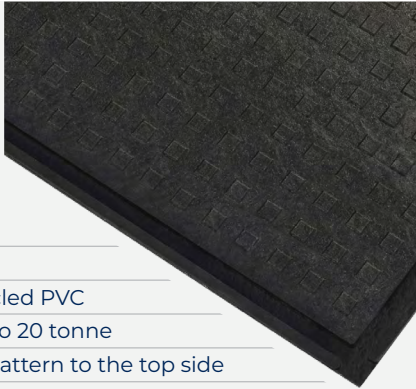

- ◆ **Size:** 800 x 1200mm (22mm thick)
3' x 4'
- ◆ **Weight:** 22kg
- ◆ **Material:** 100% recycled PVC
- ◆ **Load Capacity:** Up to 20 tonne
- ◆ **Finish:** Square top pattern to the top side
- ◆ **Application:** Construction sites, events and car parking. Good for wheeled use

Mats interlock to join, bevels available separately to create a ramped edge.

GroundTuff Urban (GP4396BL-8)

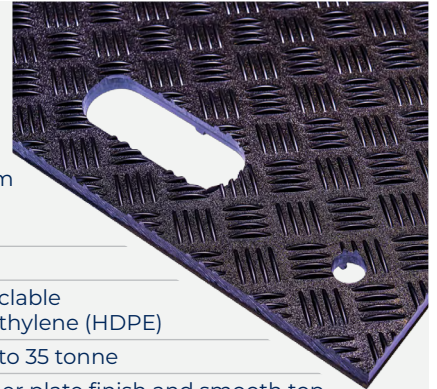

- ◆ **Size:** 1100 x 2400mm (8mm thick)
8' x 4'
- ◆ **Weight:** 24kg
- ◆ **Material:** 100% recyclable High-Density Polyethylene (HDPE)
- ◆ **Load Capacity:** Up to 35 tonne
- ◆ **Finish:** 4-bar chequer plate finish and smooth top
- ◆ **Application:** Pedestrian walkways, Construction sites, events, car parking, access routes

Compatible with all connectors. 50 can be stored in a stillage.

GroundTuff PRO (GP4896BL)



- ◆ **Size:** 1200 x 2400mm (12.7mm thick)
8' x 4'
- ◆ **Weight:** 37.5kg
- ◆ **Material:** 100% recyclable High-Density Polyethylene (HDPE)
- ◆ **Load Capacity:** Up to 60 tonne
- ◆ **Finish:** 4-bar chequer and single bar
- ◆ **Application:** Construction and groundwork cover, events, temporary roadways, car park

Compatible with all connectors. 35 can be stored in a stillage.

GroundTuff Enviro (GP4896BL-15)



- ◆ **Size:** 1230 x 2430mm (15mm thick)
8' x 4'
- ◆ **Weight:** 44kg
- ◆ **Material:** 95% recycled PVC
- ◆ **Load Capacity:** Up to 100 tonne
- ◆ **Finish:** 6-bar chequer plate finish on both sides
- ◆ **Application:** Construction sites, events, car parking, access routes

Compatible with all connectors except for the 2-way low profile. 30 can be stored in a stillage.

The ground beneath the matting must be structurally sound and free from significant depressions, such as potholes, as these can cause the matting to crack or become damaged. *Load bearing capacity is dependent on ground conditions and load characteristics

Talk to us to explore the full range and find the right solution for your environment.

+44 (0) 1779 841 899 
sales@bluediamond.uk.com 
bluediamond.uk.com 

GroundTuff® Range

Temporary Ground Protection



GroundTuff Connectors

2-way Standard Connector
(GPCB-2)




4-way Standard Connector
(GPCB-4)




2-way Low Profile Connector
(GPCL-2)



2-way Galvanised Connector
(GPCG-2)

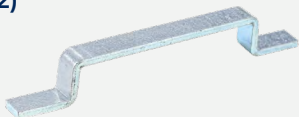

4-way Galvanised Connector
(GPCG-4)



Heavy Duty Cable Ties
(GPCT)





GroundTuff Storage

Stillage
(GPS4896BU)



Talk to us to explore the full range and find the right solution for your environment.

+44 (0) 1779 841 899 
sales@bluediamond.uk.com 
bluediamond.uk.com 