




# Happy Feet

Happy Feet is a heavy-duty anti-fatigue mat that features a 12.7mm dense foam cushion encapsulated in nitrile rubber, making it suitable for both wet and dry environments. Offering exceptional anti-fatigue benefits, the gripper backing minimises movement on the floor, whilst the textured surface and bevelled borders maximise safety. Happy Feet is a totally versatile mat, is welding safe and resistant to chemicals, animal fats, machine grease/oils and petroleum products.

## Features

- ◆ **Typical applications:** Ideal for use in heavy duty industrial applications including welding areas and static sensitive areas.
- ◆ **Material:** Nitrile rubber.
- ◆ **Cleaning:** Rinse with a hose or pressure washer. Hang or lay the mat flat to dry.
- ◆ **Sustainability:** REACH compliant.
- ◆ **Warranty:** Lifetime.

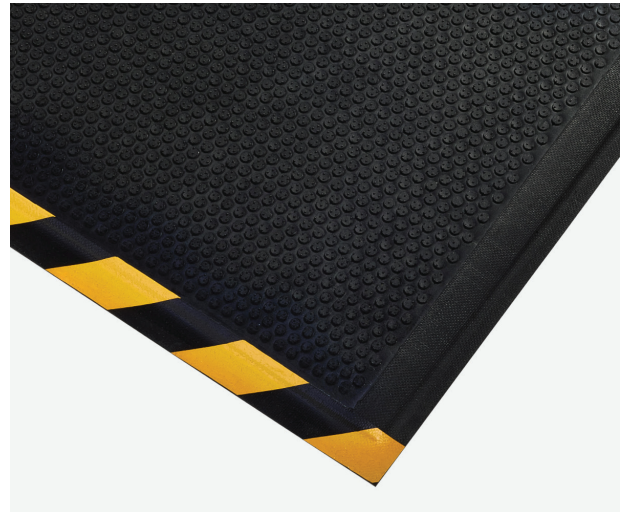

Suitable for indoor and outdoor use



For more information about this product or, to place an order [click here](#)



Code	Metric	Imperial	Thickness	Weight	Colour
HF2436BL	58cm x 85cm	2' x 3'	12.7mm	4.9kg	Black
HF2436BY	58cm x 85cm	2' x 3'	12.7mm	4.9kg	Black/Yellow
HF3660BL	85cm x 150cm	3' x 5'	12.7mm	11.4kg	Black
HF3660BY	85cm x 150cm	3' x 5'	12.7mm	11.4kg	Black/Yellow

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

## Our delivery promise

We guarantee your order will be shipped on time, every time.  
That's the Blue Diamond difference.

V5.11.24

## Get in touch

+44 (0) 1779 841 899  
sales@bluediamond.uk.com  
www.bluediamond.uk.com

# Happy Feet

## Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Anti-fatigue:	Excellent anti-fatigue properties, resistant to level 3
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Chemical resistant:	Yes
Disability friendly:	Yes, the mats have ramped edges making them suitable for wheelchair users
Dry area:	Yes
Wet area:	Yes
Oily and greasy area:	Yes
Heavy area:	Yes
Welding area:	Yes
Environment:	Suitable for indoor and outdoor use
Flame retardant:	Yes
Non-static (ESD):	Yes
Product testing:	<ul style="list-style-type: none"> <li>◆ Certified high-traction by the National Floor Safety Institute (NFSI)</li> <li>◆ DUROMETER: 65</li> <li>◆ Tensile strength: 1600 PSI</li> <li>◆ Textured Nitrile Rubber Surface for superior slip resistance ASTM C 1028-96</li> <li>◆ Static Coefficient of Friction: Dry-.92 Wet-.86</li> <li>◆ Electrostatic Propensity of Carpets: Maximum Negative 0,7kv</li> <li>◆ Passes Flammability Standard DOC-FF-1-70.Passes ATTCC Test Method 134-1996</li> </ul>
Sustainability:	REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
UV resistant:	Yes, the solid nitril rubber surface provides UV resistance
Cleaning:	Rinse with a hose or pressure washer. Hang or lay the mat flat to dry